

The A-Zperformance rear bumper is mounted on the original factory rear bumper support structure.



1. Unscrew the original factory bumper from the car.
2. Disassemble the original factory bumper, separate the outer shell, the black outer cover. You will not need this anymore.



3. Screw the thin aluminum plate back on.



4. Place the aluminum structure and the impact energy absorbing foam on a workbench.
5. In the bumper box you will find two hole templates, place them on the support structure, as you can see in the pictures below.
6. Use the OEM screws for the perfect position of the templates.

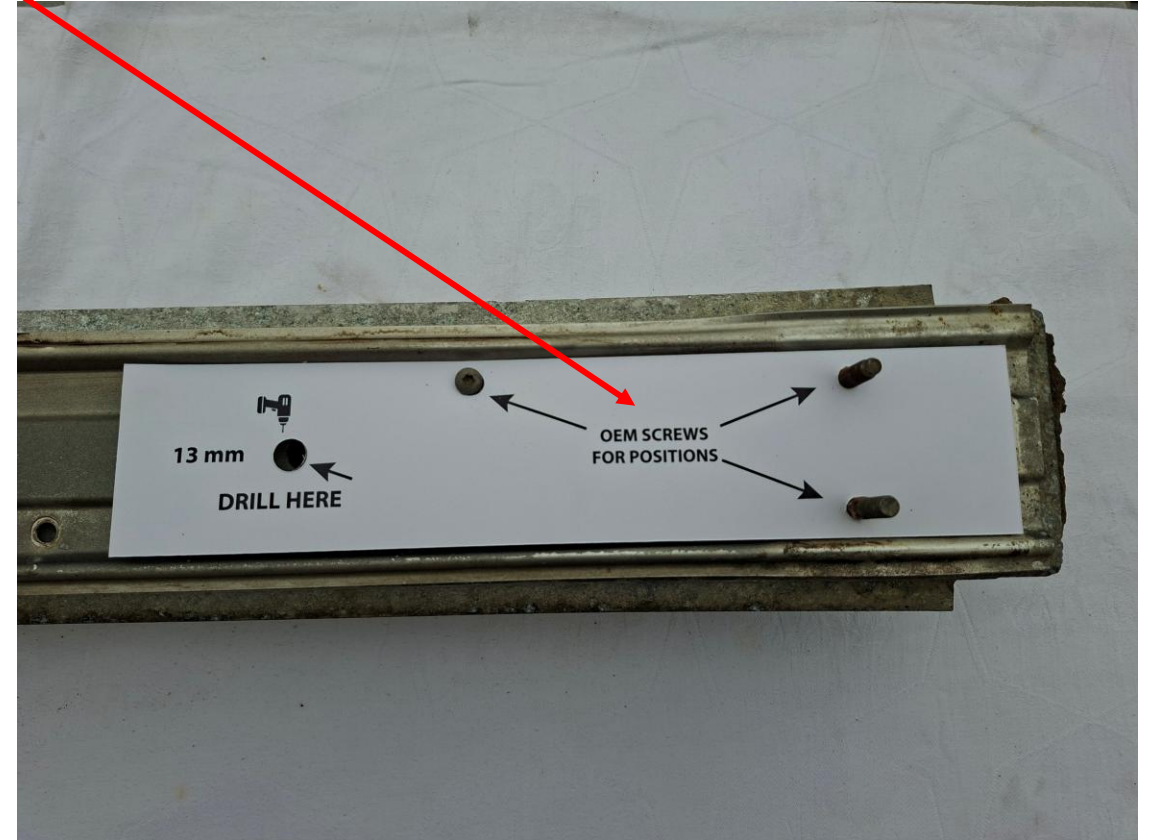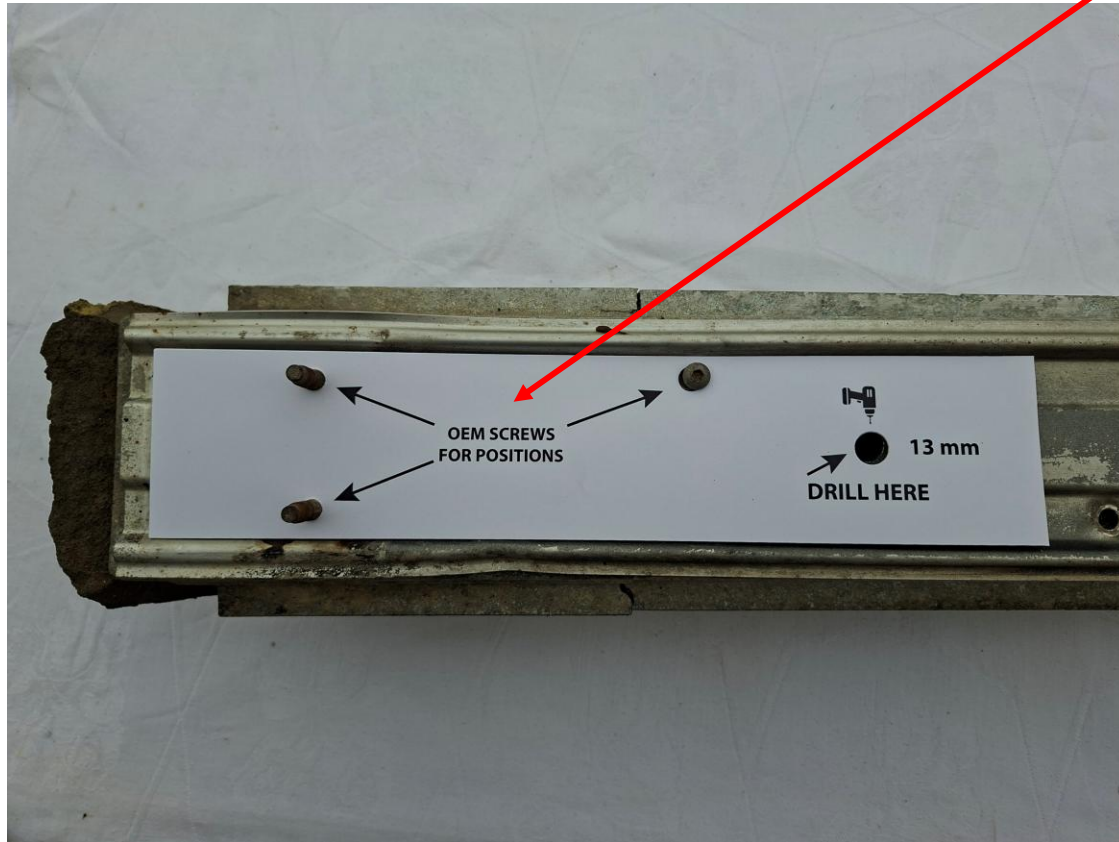

7. Drill completely through the aluminum structure and energy-absorbing foam at the points marked on the drilling template using a size 13 drill bit.



Drill it completely through!

8. Drill through the energy-absorbing foam - the foam only! - with an size 18 drill bit.




9. Insert the drilled aluminum structure and energy absorbing foam into the A-Zperformance rear bumper shell.

Note!

It will require some effort.

It should be done by two people.

It should fit perfectly.

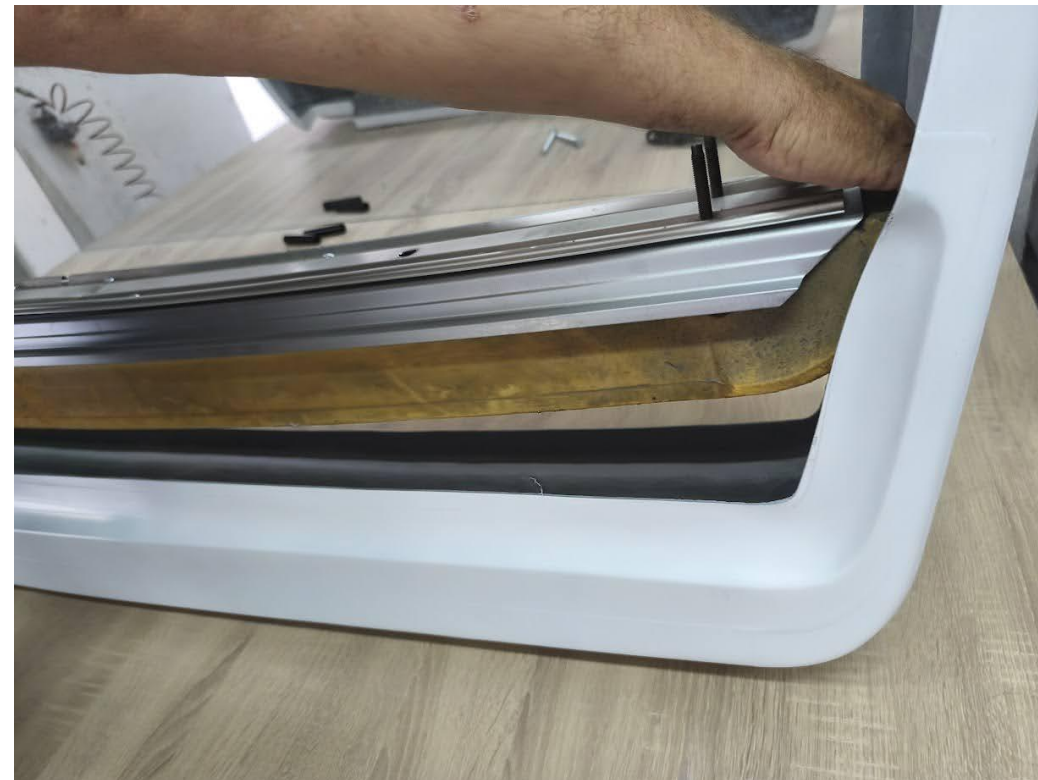

10. Insert the 2 studs into the holes

11. Screw the structure and the A-Zperformance bumper shell together.

Note!

It won't work at first. 😊

It will require some effort.

It should be done by two people.



12. Screw the bumper onto the factory mounting structure.



13. Unscrew the bumper.

14. Take it to a workshop where it will be polished to match the car's color perfectly.

15. Screw the polished bumper onto the car.

Note!

Be careful not to damage the polished bumper during installation.